


# LINEAR LIGHTING

## FASTRAK SET-UP


STYLISH MINIMAL SYSTEM THAT CAN BE EASILY  
TAILORED TO YOUR REQUIREMENTS. SUITABLE FOR  
INDUSTRIAL, COMMERCIAL, WAREHOUSE AND OTHERS.



MOUNTINGS

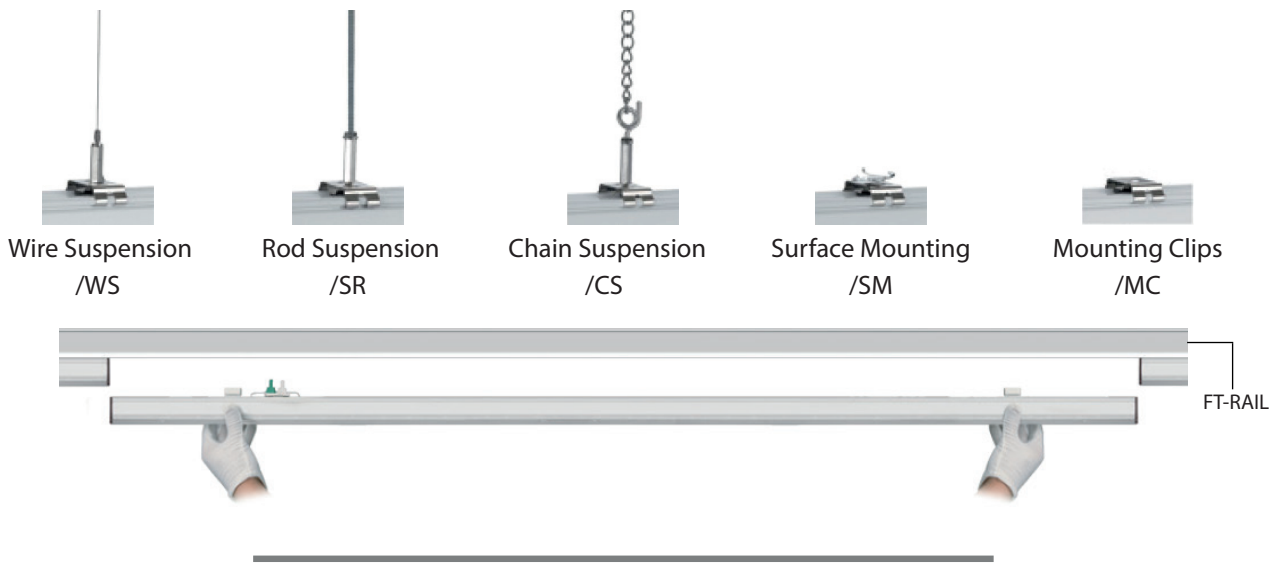

HOW IT WORKS

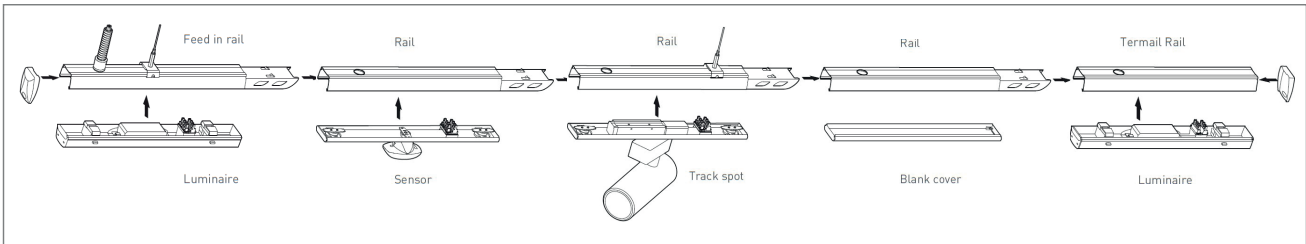

Spotlight  
Modules



Sensor  
Modules



Exit Sign  
Modules



Wireless  
Modules

CONNECTORS AND CLOSERS



L Node Connector  
/LNC



T Node Connector  
/TNC



X Node Connector  
/XNC



End Cap  
/EC



Black Cover  
/BC

## FASTRAK LUMINAIRES



**With its flat cable design to look tidy along with its many beam options to tailor your desired effect. Suited for Industrial, Commercial, warehouse and many more applications.**

- A range of Lumen outputs from 6300-25200lm
- Other outputs available upon request
- Colour Temperatures: 2700k - 3000k - 4000k - 6000k
- Beam Angle: 30°/60°/90°/120° (/30D/60D/90D/120D)
- Beam Angle symmetry: Diffuse, Left, Right or Double (/DD/LS/RS/DS)
- Colours: White, Silver or Black (/WH/SV/BK)
- Available with Dimming (/STD/DALI//1-10V/SDIM)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Dimensions: (Length x Width x Height)  
1500/3000 x 70 x 76mm

Product	MIS/FT-L Linear LED FT-Luminaire							
Light Source	LED							
System Power Luminaire lumens (4000K)	/35W 6300lm	/50W 9000lm	/70W 12600lm		/70W 12600lm	/100W 18000lm	/140W 25200lm	
Size	/1500 Length: 1500mm				/3000 Length: 3000mm			
Driver	/STD Non Dimming		/DALI DALI Dimming		/1-10V 1-10V Dimming		/SDIM Switch Dimming	
Colour Temperature	/827 2700k		/830 3000k		/840 4000k		/865 6000k	
Colour	/BK Black-RAL9017			/SLV Silver			/WH White-RAL9016	
Beam angle	/30D Extra Narrow	/60D Narrow	/90D Wide	/120D Extra Wide	/DD Diffuse Middle	/LS Left side	/RS Right side	/DS Double sided
Emergency	/ME3 Three hour maintained emergency			/ME3-ST Three hour maintained self test emergency			/ME3-PRO Three hour DALI addressable emergency	
To Specify: Fast trak Luminaire LED, 35W, 6300lm, 4000k, 1500mm long LED finished silver supplied with narrow beam angle. Complete with standard control gear. Part code: MIS/FT-L/35W/6300lm/60D/STD/1500/840								


### Optics




Asymmetric  
/LS /RS



Double  
Asymmetric  
/DS



Diffuse  
/DD

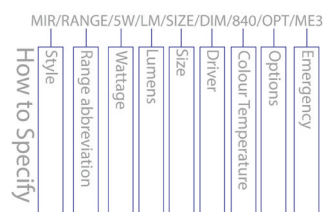

## FASTRAK TRUNKING RAIL



**The FT-RAIL comes with pre-assembled connectors with integral plug-insystem. Flexible electrical feed-in and feed-out points.**

- Colours: White, Silver or Black (/WH/SV/BK)
- Rail Types: Normal, Feed-in or Terminal (NR/FR/TR)
- Length: 600mm, 1200mm, 1500mm, 2400mm, 3000mm or 4500mm (/600/1200/1500/2400/3000/4500)
- Mountings: Surface Mounting, Mounting Clips  
Suspension Chain, Suspension Rod or Suspension Cord  
(SM/MS/SCH/SR/SCO)
- Maximum current is 16A, allowing 70pcs of 1500mm 50W in one serial row with 220VAC power supply.
- Trunking rail modules with pre-assembled connectors
- Separate power supplies, dimming or emergency supply can be integrated

Product	MIS/FT-RAIL Linear Rail					
Light Source	LED					
Size Length	/600 600mm	/1200 1200mm	/1500 1500mm	/2400 2400mm	/3000 3000mm	/4500 /4500mm
Colour	/BK Black-RAL9017		/SLV Silver		/WH White-RAL9016	
Mountings	/SM Surface Mounting	/MC Mounting Clips		/CS Chain Suspension	/SR Suspension Rod	/SCO Suspension Cord
Rail Types	/NR Normal Rail		/FR Feed-in Rail		/TR Terminal Rail	
To Specify: FT-RAIL, Linear Rail Feed-in, surface mounted finished silver and is 1500mm in length. Part code: MIS/FT-RAIL/1500/SV/FR/SM						

### Connecting Trunking Rail

Both trunking rails should keep in perfect position then push to click



$$\text{FT-L} + \text{FT-RAIL} + \text{END CAPS/FEED} = \text{FASTRAK}$$

## STORY BOARD

OR

FEED IN

FEED IN  
CONNECTOR

EXPLODED VIEW

CLIPPING MECHANISM

HOW IT CLIPS TO THE  
FT-RAIL

## FASTRAK FEATURES

3 Phase Optional

Extra Cable Tray  
For cable of speaker, camera or other devices

DIP Switch Driver

3 hrs Duration for Internal Emergency  
TUV approved Emergency Solution

Emergency driver; Battery Pack

on/off driver or dimming driver

## HOW IT FITS TOGETHER

