


FLEX LED RANGE

Flexible LED lighting system


LED

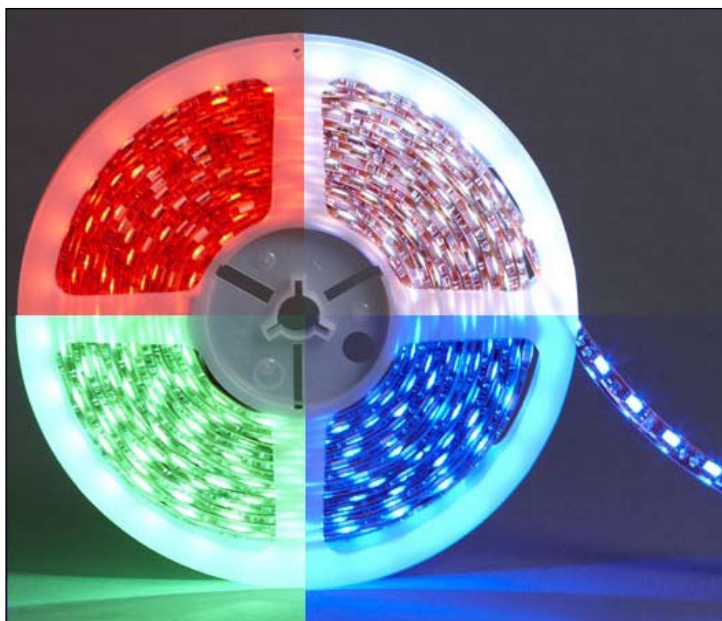

Available in a variety of single colours including white (2700k - 6000k) or RGB colour change



Slim profile of up to 5mm height.

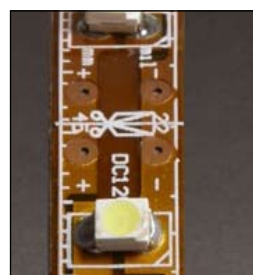


Cut point indicated by icon

Description


The FLEX LED range is designed to provide flexible LED accent lighting that can be customized to individual project requirements.

General Features


- Available in the following colour options: (27) 2700K warm white, (35) 3500K white, (40) 4000K cool white, (60) 6000K daylight, (YL) yellow, (RD) red, (GR) green, (BL) blue, (PK) pink, (PR) purple and (RGB) RGB colour changing.
- The FLEX LED range is supplied in two output options: 60 LEDs per metre (MI/FEX/60) or 120 LEDs per metre (MI/FEX/120). RGB option only available in 60 LEDs per metre option.
- Typical lumens per metre output are as follows: white 60 LEDs (194lm), white 120 LEDs (236lm), red 60 LEDs (52lm), green 60 LEDs (180lm) and blue 60 LEDs (34lm).
- Can be specified with an IP67 clear sleeve and IP rated wiring end caps for installations that require dirt or moisture protection.
- Dimensions: Standard FLEX LED 10mm width x 2mm height; IP67 FLEX LED 10mm width x 5mm height.
- Drivers (ordered separately) are available in 12W, 25W, 60W, 100W and 200W. (Example: for a four metre length using 60 LEDs per metre, a 25W driver is required (4x4.8W/m=19.2W). Dimming options are available. Please contact our technical office for details.
- Cut point is every 50mm.
- 120° beam angle

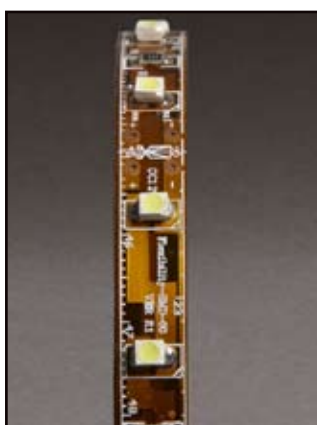

60 LEDs/m - 4.8W/m

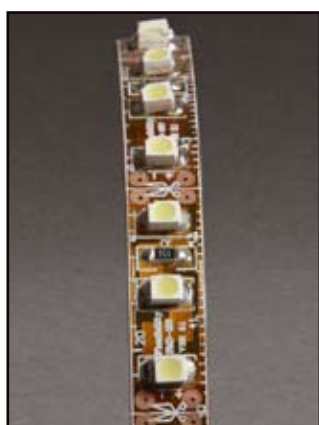

120LEDs/m - 9.6W/m

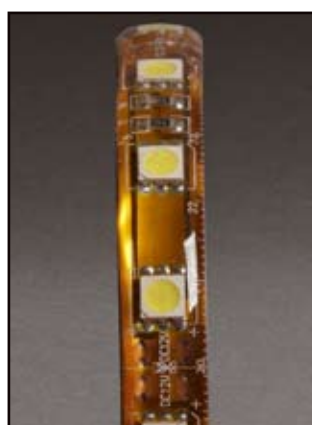

IP67 rated 60 LEDs/m - 4.8W/m

Installation

Self adhesive backing for ease of installation on rear of strip. Lengths can either be cut for shorter runs or joined together for extended runs. Overall length of FLEX LED roll is five metres.

How to specify

MI/FEX/60/35/1m for a one metre length of 60 LEDs per metre FLEX LED with a white 3500k colour.

Ordering Information

Reference Number	LED Colour Options											Additional Options
	27	35	40	60	RD	GR	BL	YL	PK	PR	RGB	
MI/FEX/60/	•	•	•	•	•	•	•	•	•	•	•	•
MI/FEX/120/	•	•	•	•	•	•	•	•	•	•	•	•

When ordering quote reference number followed by essential & specific options.

Tel: 01494 437962

Fax: 01494 462657

Email: sales@midlighting.co.uk

Due to ongoing research and development specifications are subject to change without prior notice. Some availability subject to minimum order quantity