




The ADA-2 is a high output IP66 direct and direct/indirect decorative, robust wall mounted amenity luminaire and black powder coat finish.

- A lumen output of 2300lm or 4400lm
- Colour Temperature: 4100k
- Lens: Clear glass lens
- Beam Angles: 30°, 70° or 100° (30D/70D/100D)
- Colours: Black (/BK)
- Standard Non Dimming (/STD)
- Emergency Version Available (/ME3, /ME3-ST, /ME3-Pro)
- Distribution: Direct or Direct/Indirect with beam selection
- Suitable for BESA box fixings.
- IP Rating: IP66
- Housing: Die cast aluminium fixing base and frames.
- Black powder coat polyester finish over epoxy powder as standard. Other colours available.
- Dimensions: (Diameter x Depth x Height)
 Direct/Indirect - Ø146 x 226 x 316mm
 Direct - Ø146 x 226 x 260mm

Product	MI/ADA-2 Wall IP66 LED Luminaire		
Light Source	LED		
System Power <small>Luminaire lumens (4100K)</small>	/20W/DL 2300lm (Direct)	/40W/UDL 4400lm (Direct/Indirect)	
Size	260mm (Direct) Ø146 x 226 x 260mm	316mm (Direct/Indirect) Ø146Ø x 226mm x 316mm	
Driver	/STD Non Dimming		
Colour Temperature	/841 4100k		
Beam Angle Up	/UN Narrow 30°	/UM Medium 70°	/UW Wide 100°
Beam Angle Down	/DN Narrow 30°	/DM Medium 70°	/DW Wide 100°
Emergency	/ME3 Three hour maintained emergency	/ME3-ST Three hour maintained self test emergency	/ME3-PRO Three hour DALI addressable emergency
To Specify: ADA-2, 40W, 4400lm, 4000k, Wide Beam UP, Medium Beam Down wall mounted luminaire finished black complete with standard integral control gear. Part code: MI/ADA2/40W/UD//4400lm/STD/841/UW/DM/BK			

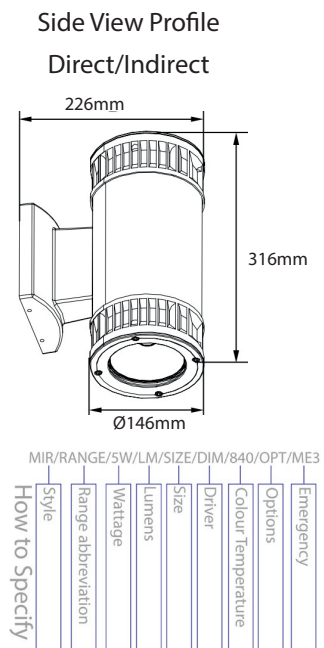

Exterior