ALULINE100

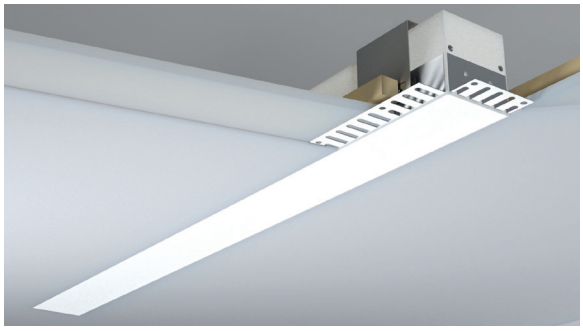

PLASTER-IN PROFILE (/P)

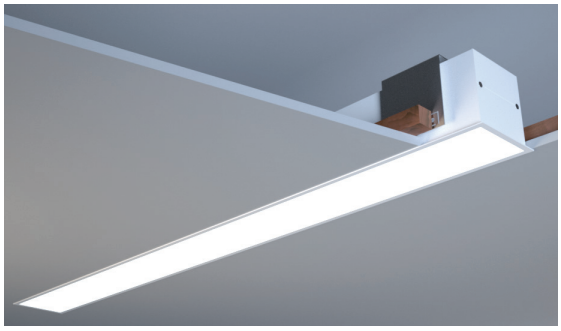

TRIMMED PROFILE (/T)

A high quality, high-output, recessed extruded system ideally suited for modular or continuous runs. Its modern, minimalist design makes it ideal for offices, meeting rooms, circulation areas, and reception spaces.

- Colour Temperatures: 3000K - 4000K -5000K - TWH
- Colours: Anodic Silver, white RAL9010 and White RAL9016 as standard, other RAL colours available
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI) & Wireless Emergency (/ME3-WI)
- Available in Emergency (/ME3/ME3-ST/ME3-PRO)
- Diffusers: Polar White or Micro Pristmatic Optic (/PW/MPO)
- Body: Aluminium Extrusion
- Body Options: Trimmed (114mm width) /Plaster-in (100mm width) (/T/P)
- Depth: 110mm
- Available in continuous runs with aluminium infills. Please contact our technical department for further details

Product	MIR/ALU100 Recessed LED Linear			
LED Light Source	/LO Low Output	/SO Standard Output	/HO High Output	
Lumens /m Luminaire lumens (4000K)	17.6W 1900lm/m	24.5W 2642lm/m	30.8W 3255lm/m	
Size	/6 592mm	/9 873mm	/12 1153mm	/15 1434mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000K	/840 4000K	/850 5000K	/TWH Tunable White
Colour	/SLV Anodic Silver		/WH White	
Diffuser Options	/PW Polar White Diffuser		/MPO Micro Pristmatic Optic	
Emergency	/ME3 Three hour main-tained emergency	/ME3-ST Three hour maintained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency

To Specify: ALULINE 100 LED, trimmed, 4000K, 1153mm long, Low output LED linear recessed finished white supplied complete with DALI control gear and polar white diffuser.
Part code: MIR/ALU100/T/LO/12/DALI/840/WH/PW







01268 725086 | www.midlighting.co.uk | sales@midlighting.co.uk

Due to ongoing research and development specifications are subject to change without prior notice. Some availability subject to minimum order. All luminaire lumens are 4000k colour temperature readings.