



Recessed

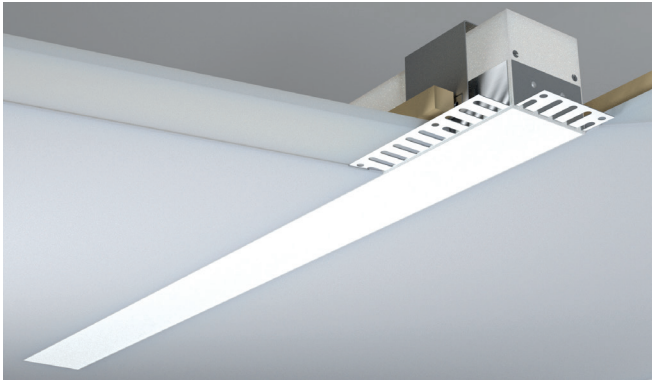

Plaster-in Profile (/P)

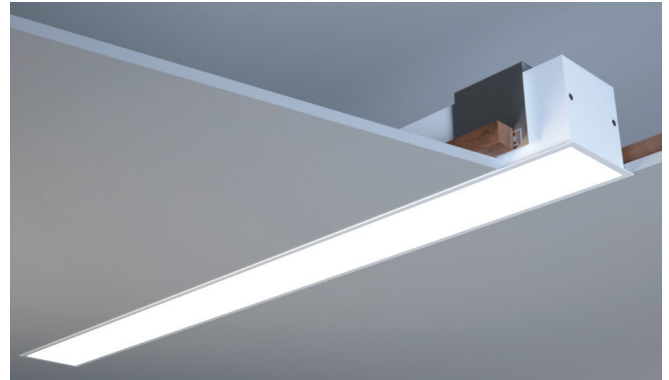

Trimmed Profile (/T)

**A high quality recessed extruded system ideally suited for modular or continuous runs.**

- Colour Temperatures: 3000k - 4000k - 5000k - TWH
- Colours: Anodic Silver, white RAL9010 and White RAL9016 as standard, other RAL colours available
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI)
- Available in Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Diffusers: Polar White or Micro Prismatic Optic (/PW/MPO)
- Body: Aluminium Extrusion
- Body Options: Trimmed (114mm width) /Plaster-in (100mm width) (/T/P)
- Depth: 110mm
- Available in continuous runs with aluminium infills. Please contact our technical department for further details

Product	MIR/ALU100 Recessed LED Linear			
LED Light Source	/LO Low Output	/SO Standard Output		/HO High Output
Lumens /m <small>Luminaire lumens (4000K)</small>	17.6W 1900lm/m	24.5W 2642lm/m		30.8W 3255lm/m
Size	/6 592mm	/9 873mm	/12 1153mm	/15 1434mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000k	/840 4000k	/850 5000k	/TWH Tunable White
Colour	/SLV Anodic Silver		/WH White	
Diffuser Options	/PW Polar White Diffuser		/MPO Micro Prismatic Optic	
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour maintained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency
To Specify: ALULINE 100 LED, trimmed, 4000k, 1153mm long, Low output LED linear recessed finished white supplied complete with DALI control gear and polar white diffuser. Part code: MIR/ALU100/T/LO/12/DALI/840/WH/PW				

