


Recessed



Plaster-in Profile (/P)

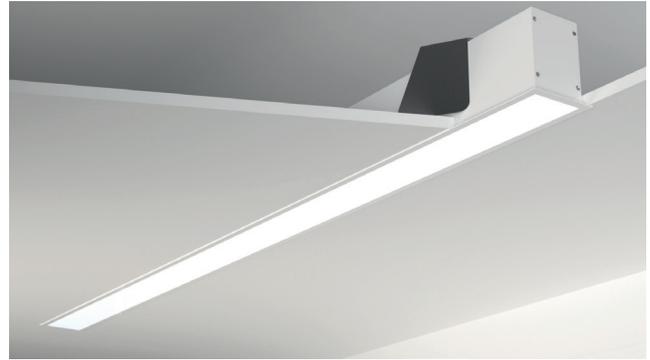

Trimmed Profile (/T)

ALULINE60 range provides an energy efficient and high output LED source in the style of a recessed linear luminaire. With a modern minimalist design the luminaire is suitable for a wide range of applications including offices, meeting rooms, circulation areas and receptions.

- A range of low, standard and high lumen outputs
- Colour Temperatures: 3000k - 4000k - TWH
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Diffusers: Polar White or Micro Prismatic Optic (/PW/MPO)
- A range of modular sizes available from 592mm-3609mm, and available in continuous lengths to suit project requirements
- Available in both trimmed and plaster-in options (/T/P)
- Additional sizes, lumen and wattage options available
Please contact our technical for further details
- 5 year system warranty

Product	MIR/ALU60 Recessed LED Linear			
LED Light Source	/LO Low Output	/SO Standard Output		/HO High Output
Lumens/m <small>Luminaire lumens (4000K)</small>	17W 1836lm/m	25W 2692lm/m		32.4W 3429lm/m
Length	/6 592mm	/9 873mm	/12 1153mm	/15 1434mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000k		/840 4000k	/TWH Tunable White
Colour	/WH White			
Diffuser Options	/PW Polar White		/MPO Micro Prismatic Optic	
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour main- tained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency
To Specify: ALULINE60 LED, 4000k, Standard Output LED modular recessed at 1434mm long finished white supplied complete with DALI control gear and polar white diffuser. Part code: MIRALULINE60/SO/15/DALI/840/WH/PW				

