ALULINE60

PLASTER-IN PROFILE (/P)

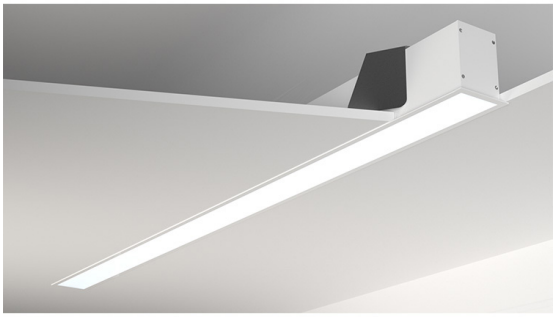

TRIMMED PROFILE (/T)

The ALULINE60 range delivers a high-output, energy-efficient LED in a sleek recessed linear form. With an average efficacy of 130 lm/W, its minimalist design is ideal for offices, meeting rooms, circulation areas and receptions.

- A range of low, standard and high lumen outputs
- Colour Temperatures: 3000K - 4000K - TWH
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI) & Wireless Emergency (/ME3-WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Diffusers: Polar White or Micro Pristmatic Optic (/PW/MPO)
- Recessed Mounting: Trimmed or Plaster-In (/T/P)
- A range of modular sizes available from 592mm-3609mm, and available in continuous lengths to suit project requirements
- Additional sizes, lumen and wattage options available Please contact our technical for further details
- 5 year system warranty

Product	MIR/ALU60 Recessed LED Linear			
LED Light Source	/LO Low Output	/SO Standard Output	/HO High Output	/EHO Extra High Output
Lumens/m Luminaire lumens (4000K)	15W 1961lm/m	21W 2748lm/m	28W 3548m/m	32W 4059lm/m
Length	/6 592mm	/9 873mm	/12 1153mm	/15 1434mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000K	/840 4000K	/TWH Tunable White	
Colour	/WH White			
Diffuser Options	/PW Polar White		/MPO Micro Pristmatic Optic	
Emergency	/ME3 Three hour main-tained emergency	/ME3-ST Three hour main-tained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency

To Specify: ALULINE60 LED, 4000K, Standard Output LED modular recessed at 1434mm long finished white supplied complete with DALI control gear and polar white diffuser.
Part code: MIR/ALULINE60/SO/15/DALI/840/WH/PW

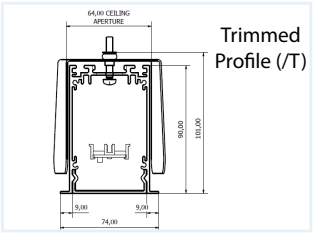

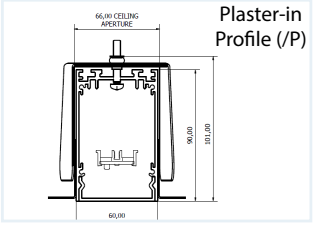

01268 725086 | www.midlighting.co.uk | sales@midlighting.co.uk

Due to ongoing research and development specifications are subject to change without prior notice. Some availability subject to minimum order. All luminaire lumens are 4000k colour temperature readings.