


# DOME D100

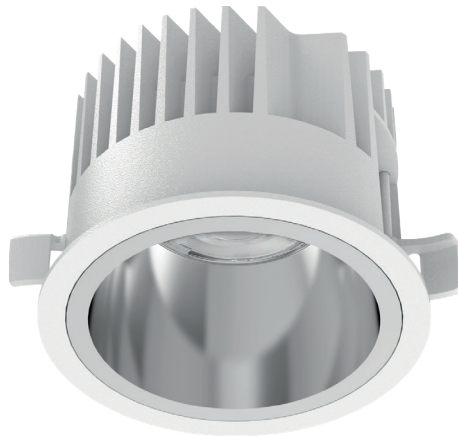

**A high quality LED downlight, the Dome D100 is designed for efficiency and functionality with its sleek exterior aluminium powdered coat.**

- A lumen outputs of 1146lm or 1515lm
- Colour Temperatures: 2700k - 3000k - 4000k
- Beam Angle: 18° to 70° Options
- Available with Dimming (/STD/DALI/MDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Average luminaire lumens listed below
- Reflector Colours: Black, Grey and White
- IP Rating: IP54
- CRI80 as standard, CRI90 Available
- Aluminium Powder coating
- Dimensions: (Diameter x Height)  
Ø110 x 79mm
- Cut-out Dimension: (Diameter) Ø100mm

Product	MID/DOME/D100 DOME Downlight				
Light Source	LED				
System Power Luminaire lumens (4000K)	/11W 1146lm		/15W 1515lm		
Size (cut-out size)	Ø110mm x 79mm Ø100mm				
Driver	/STD Non Dimming	/DALI DALI Dimming	/MDIM Mains Dimming		/WI Wireless Control
Colour Temperature	/827 2700k		/830 3000k		/840 4000k
Reflector Colour	/BK Black		/WH White		/GR Grey
Beam Angle Options	/18D 18 Degree	/25D 25 Degree	/30D 30 Degree	/50D 50 Degree	/70D 70 Degree
Emergency	/ME3 Three hour maintained emergency	/ME3-ST Three hour maintained self test emergency	/ME3-PRO Three hour DALI addressable emergency		/ME3-WI Three hour wireless addressable emergency
To Specify: DOME, D100, 11W, 4000k, 1146lm, DALI Dimming, 30 Degrees, LED downlight finished BLACK Part code: MID/DOME/D100/11W/1146lm/DALI/840/BK/30D					

### Reflector Options

