




LEXLED/60/4.8W-m
 60 LEDs per metre
 Max. 4.8 Watts per metre
 Width: 8mm Height: 2mm
 410 Lumens per metre (4000k)



LEXLED/120/9.6W-m
 120 LEDs per metre
 Max. 9.6 Watts per metre
 Width: 8mm Height: 2mm
 860 Lumens per metre (4000k)



LEXLED/60/14.4W-m
 60 LEDs per metre
 Max. 14.4 Watts per metre
 Width: 10mm Height: 2mm
 1050 Lumens per metre (4000k)



LEXLED/60/14.4W-m/RGBW
 60 LEDs per metre
 Max. 14.4 Watts per metre
 Width: 8mm Height: 2mm




MID/DRV/CV/60W/24



MID/DRV/CV/100W/24
MID/DRV/CV/150W/24

- A range of wattages from 4.8W-M to 19.6W-M
- 60 or 120 LEDs per Metre
- Colour Temperatures: 2700k - 3000k - 4000k - RGBW
- Available with Dimming (/STD/DALI/SDIM/MDIM)
- LEXLED tape is supplied in rolls of 6 or 12M lengths and can be cut to length in 50-100 mm intervals
- MID Lighting are able to supply lengths to your project requirements, stated in the part number (see table below)
- Aluminium extrusion profiles and opal/clear diffuser options available, see next page for details
- IP Rating: IP20 as standard or as IP67 (/IP67)
- Available with drivers. See driver details above for part codes. If you require a wattage that is not listed or a dimming driver please contact our technical department
- Available in 10 meter length or cut to specific size


Product	MI/LEXLED LED Tape			
Light Source	LED			
System Power	/4.8W-M 410lm/M	/9.6W-M 860lm/M	/14.4W-M 1050lm/M	/19.6W-M 1900lm/M
Size	8 x 2mm	8 x 2mm	10 x 2mm	12 x 2mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/MDIM Mains Dimming
Colour Temperature	/827 2700k	/830 3000k	/840 4000k	/RGBW Colour changing
Length	/10M* * Required length			
Emergency	/RME3 Remote three hour maintained emergency	/RME3-ST Remote three hour maintained self test emergency	/RME3-PRO Remote three hour DALI addressable emergency	/RME3-WI Remote three hour Wireless addressable emergency
To Specify: LEXLED, 9.6W-M, 4000k, 860lm/M, LED tape supplied with remote DALI control gear, opal diffuser, 6 metres* in length. See next page to specify with extrusion. Part code: MI/LEXLED/9.6W-M/DALI/840/6M *6M Length is shown as an example. Should you require different lengths please specify the length in the part code.				



MIR/RANGE/SW/LM/SIZE/DIM/840/OPT/ME3
 How to Specify
 Style
 Range abbreviation
 Wattage
 Lumens
 Size
 Driver
 Colour Temperature
 Options
 Emergency



Croydon College

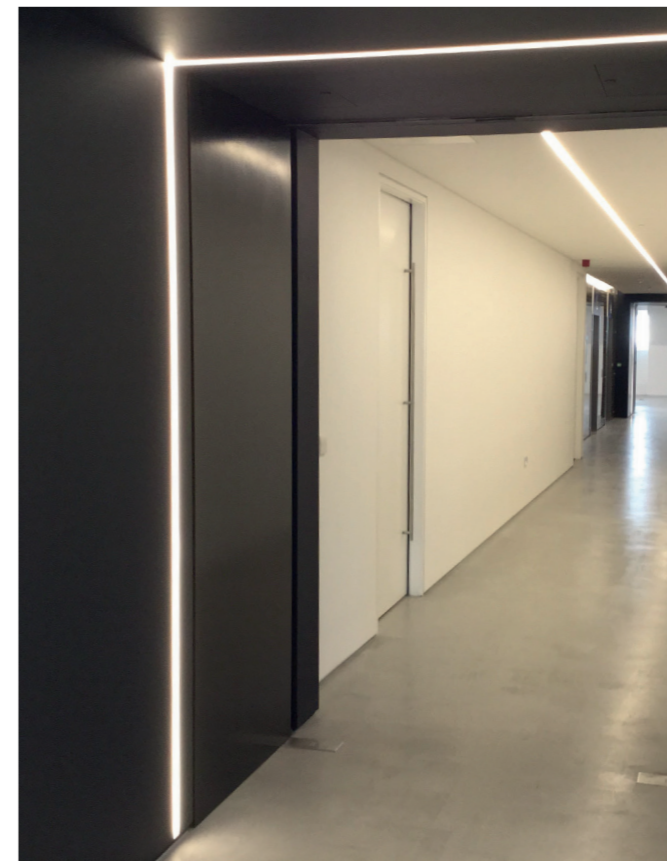

180 Oxford Street - UK House



Croydon College




280 High Holborn - Gilead Sciences

STOCK OPTION

STOCK OPTION




LEX/S Extrusion

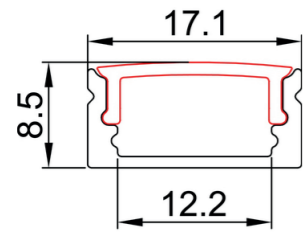

LEX/S dimensions




LEX/R/SLIM Extrusion

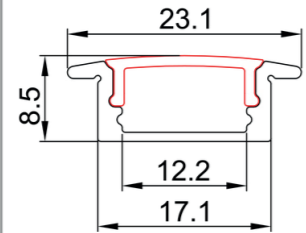

LEX/R/SLIM dimensions




LEX/S/60D Extrusion

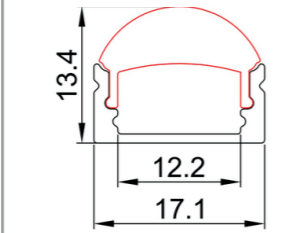

LEX/S/60D dimensions




LEX/MID007-R Extrusion

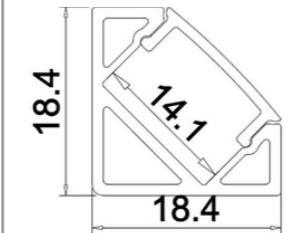

LEX/MID007-R dimensions




LEX/MID014 Extrusion

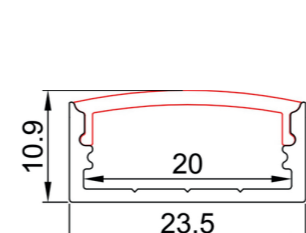

LEX/MID014 dimensions




LEX/MID015-R Extrusion

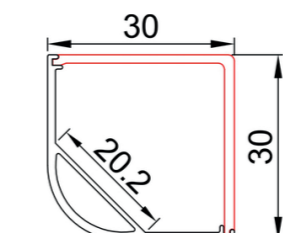

LEX/MID015-R dimensions




LEX/MID016-R Extrusion

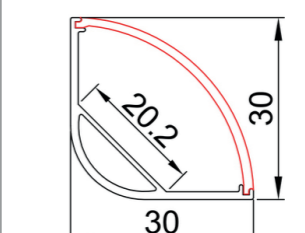

LEX/MID016-R dimensions




LEX/MID034 Extrusion

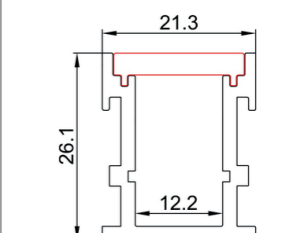

LEX/MID034 dimensions




LEX/R/B Extrusion

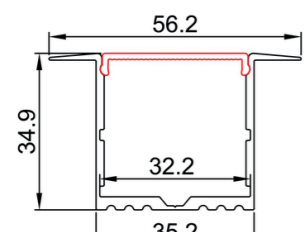

LEX/R/B dimensions




LEX/S/B Extrusion

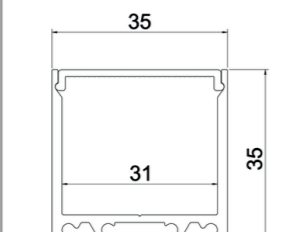

LEX/S/B dimensions




LEX/S/B45 Extrusion

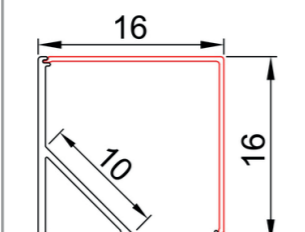

LEX/S/B45D dimensions




LEX/MID006 Extrusion

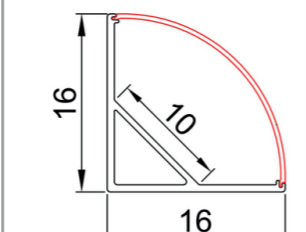

LEX/MID006 dimensions




LEX/MID062 Extrusion



LEX/MID062 dimensions




LEX/MID068 Extrusion

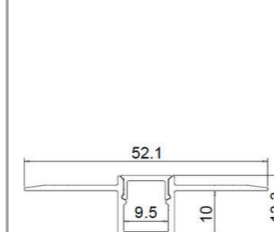

LEX/MID068 dimensions




LEX/MID069 Extrusion

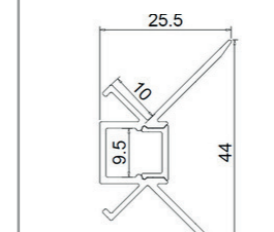


LEX/MID069 dimensions




LEX/MID070 Extrusion



LEX/MID070 dimensions

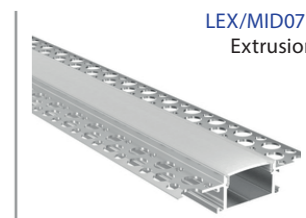


LEX/MID071 Extrusion

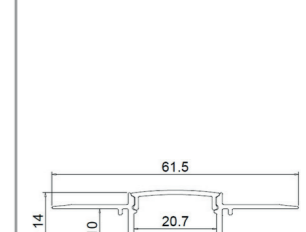

LEX/MID071 dimensions




LEX/MID003-R Extrusion

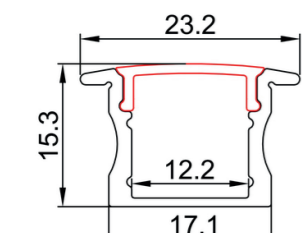

LEX/MID003-R dimensions




LEX/MID004-R Extrusion

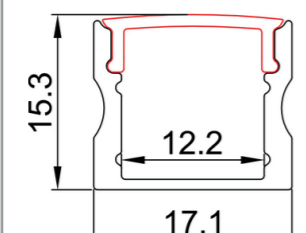

LEX/MID004-R dimensions




LEX/MID008 Extrusion

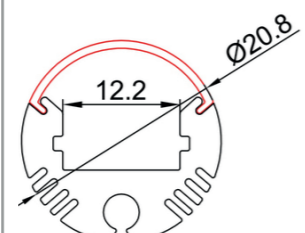

LEX/MID008 dimensions



LEX/MID013 Extrusion

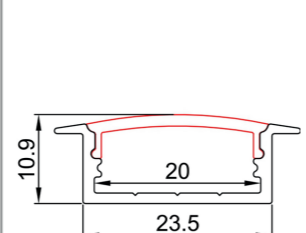

LEX/MID013 dimensions