






The **MAG-48V TRK-ZOOM** is an integrated LED zoom track spotlight featuring precise beam control and colour temperature adjustment. It also supports both remote digital operations and Knob-based manual control.

- A range of lumen outputs from the 55° len, 1650-4400lm
- Colour Temperatures: 2700K - 3000K - 4000K - 5700K
- Beam Angles: Adjustable, range from 10°-55°
- Colours: Black or White (/BK/WH)
- Available with Dimming (/STD/DALI)
- Wireless dimming option available (/WI)
- Refer to track system **page 100-101** for the following mounting, Surface, Recessed and Wire suspended
- CRI80 as standard, CRI90 and CRI97 available upon request
- Dimensions: (Diameter x Height)
 - /15W - 55Ø x 216mm
 - /20W - 65Ø x 224mm
 - /30W - 75Ø x 235mm
 - /35W - 85Ø x 240mm
 - /40W - 95Ø x 245mm

Product	MAG-48V TRK-ZOOM 48V Magnetic Adjustable Spotlight				
Light Source	LED				
System Power Luminaire lumens (4000K)	/15W 1650lm	/20W 2200lm	/30W 3300lm	/35W 3850lm	/40W 4400lm
Size (Dia x Height)	55Ø x 216mm	65Ø x 224mm	75Ø x 235mm	85Ø x 240mm	95Ø x 245mm
Driver	/STD Non Dimming		/DALI DALI Dimming		/WI Wireless Controls
Colour Temperature	/827 2700K	/830 3000K		/840 4000K	/857 5700K
Colour	/WH White			/BK Black	
Beam Angle	Adjustable 10°-55°				
Emergency	Remote EMLED MAG TRK available				
To Specify: MAG-48V TRK-ZOOM LED track spotlight, 15W, 1650lm, 4000K, 55° beam angle, CRI80, surface-mounted, finished in black, and supplied complete with DALI control gear. Part Code: MI/MAG-48V/TRK-ZOOM/15W/6/1650lm/DALI/840/55D/SM/BK					

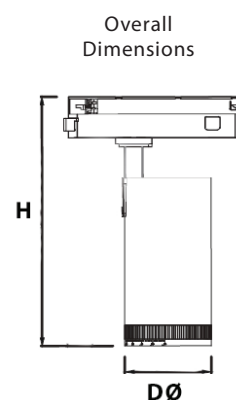


MAG-48V TRK

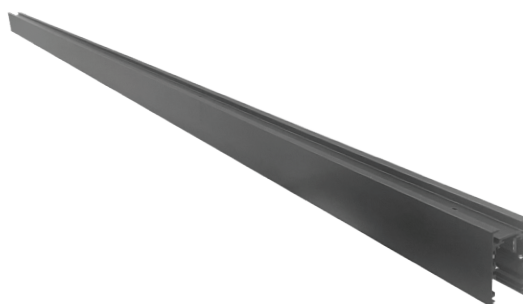

The MAG-48V TRK is a 48V low-voltage magnetic track system with a sleek aluminium profile for modern lighting applications. It is compatible with MAG-48V luminaires, enabling a customisable lighting solution.

- Colours: Matt White or Matt Black (/WH/BK)
- The maximum continuous run is 40 meters
- Connectors: See previous page for more details (/VIL/VEL/LL/TM/CS/HL) * If required*
- Compatible with any brand external 48V output constant voltage switching power supply
- Magnetic End Caps (/MC)
- Mountings: Plaster-in, Surface mounted, Wire Suspended or Rod Suspended (/P/SM/WS/RS)
- IP Rating: IP20
- Section View Dimensions: See image below
- Dimensions: Standard Magnetic Track Length - 0.5M, 1.0M, 1.5M or 2.0M
- Please contact technical department for more information

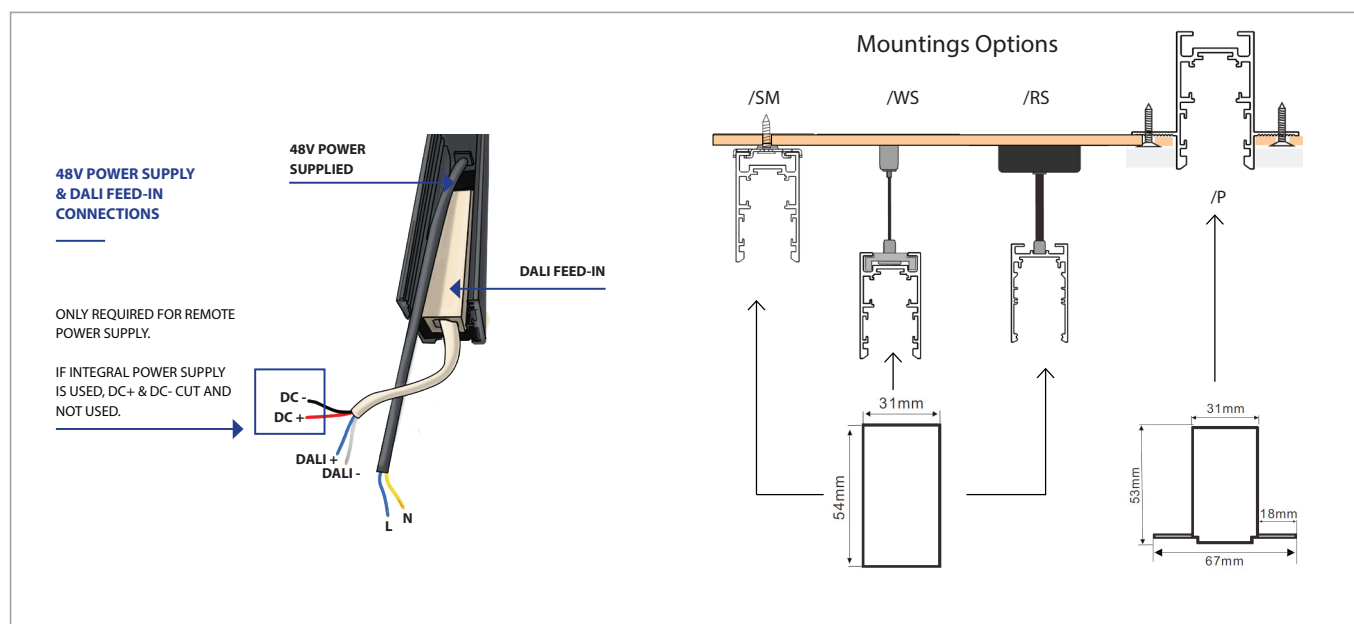

PART CODE GUIDE

LINE 1

Example: MAG-48V-TRK/BK/WS

Product	MAG-48V-TRK Magnetic Track System				
Colour Options	/WH White		/BK Black		
Mountings	/SM Surface Mounted	/WS Wire Suspended	/P Plaster-in	/RS Rod Suspended	
Lengths	/0.5m Standard Lengths	/1m Standard Lengths	/1.5m Standard Lengths	/2m Standard Lengths	Lengths as long as required by combining standard length

LINE 2

Example for DALI : MAG-TRK/48V/DALI FEED POWER IN KIT

DRIVER	/STD Non Dimming	/DALI MAG-48V-TRK/DALI FEED POWER IN KIT
--------	---------------------	---

LINE 3

Example for 3m: (x1) JOINER KIT

JOINERS	E.G to get 3m = 2m + 1m, so you need one joiner kit
---------	---

LINE 4

Track Name, Mounting Type & Length

Mounting kit	Surface Mounted Kit	Wire Suspended Kit	Plaster-in Kit	Rod Suspended Kit
--------------	---------------------	--------------------	----------------	-------------------

LINE 5

Power Supply

POWER SUPPLY MUST BE GREATER THAN THE TOTAL WATTAGE OF ALL FITTINGS ALONG THE TRACK. MULTIPLE POWER SUPPLIES MAY BE REQUIRED FOR LARGER CONFIGURATIONS.

FINAL PART CODE

To Specify: A wire suspended 48V Magnetic Track, 3meters long, black and supplied with a DALI Feed in power kit.

MAG-48V-TRK/BK/WS
DALI FEED POWER IN KIT
(x1) JOINER KIT
Wire Suspension Kit
100W 48V Power Supply

Ensure lines are listed separately as shown above.

PART CODE GUIDE