




***The MAG-TRK8 is a quick swap track luminaire spotlight with anti-glare and 3 installation modes ideally suited for showrooms, office,store and etc.***

- A lumen output of 524lm
  - Colour Temperatures: 3000k - 4000k - 5000k - 6000k
  - Beam Angles: 15°,24° or 36°(/15D/24D/36D)
  - Colours: Black or White (/BK/WH)
  - Available with Dimming (/STD/0-10V/DALI)
  - Refer to track system page 84 for the following mounting, Surface, Recessed and Wire suspended
- Refer to track system page 84 for the following mounting, Surface, Recessed and Wire suspended
  - CRI80 as standard, CRI90 Available
  - Dimensions: See image below

Product	MI/MAG-TRK8 LED TRK Spotlight			
Light Source	LED			
System Power Luminaire lumens (4000K)	/8W 524lm			
Size	See dimensions on image			
Driver	/STD Non Dimming	/0-10V 0-10V Dimming		/DALI DALI Dimming
Colour Temperature	/830 3000k	/840 4000k	/850 5000k	/860 6000k
Colour	/WH White		/BK Black	
Beam Angle	/15D 15 Degrees	/24D 24 Degrees		/36D 36 Degrees
Emergency	n/a			
To Specify: MAG-TRK8, 8W, 524lm, 4000k, 524lm, 15 degree beam angle, CRI 80, LED track spotlight Suspend and supplied with DALI control gear and finished in White. Part code: MI/MAG-TRK8/8W/524lm/DALI/840/15D/WH				






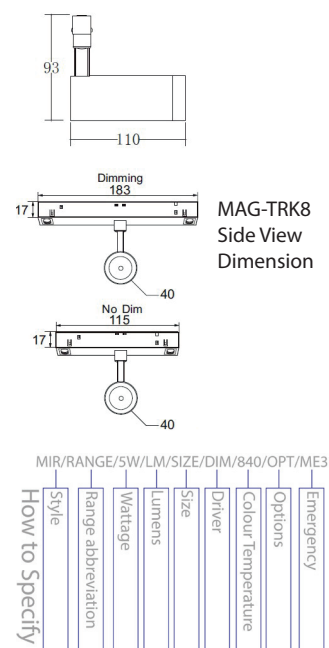


# MAGNETIC- TRK SYSTEM


## Connector Installations

Various connecting options for the  
Magnetic TRK solutions shown below.  
Designed for desired shape and size.


### Mountings

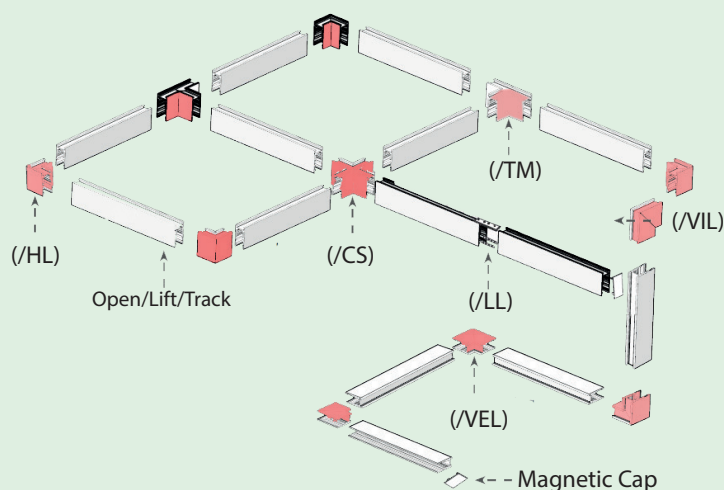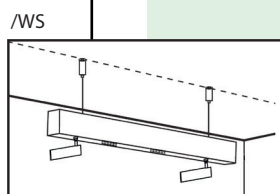


Vertical inner L splicing  
(VIL)




Vertical external L  
splicing Installation (VEL)

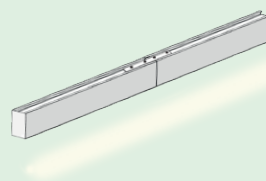


Linear Track line splice  
(LL)

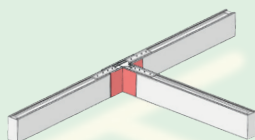

T - type Mosaic splicing  
(TM)

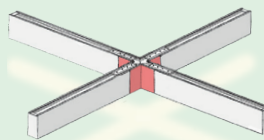

Cross stitching splicing  
(CS)



Horizontal L Splicing  
(HL)