
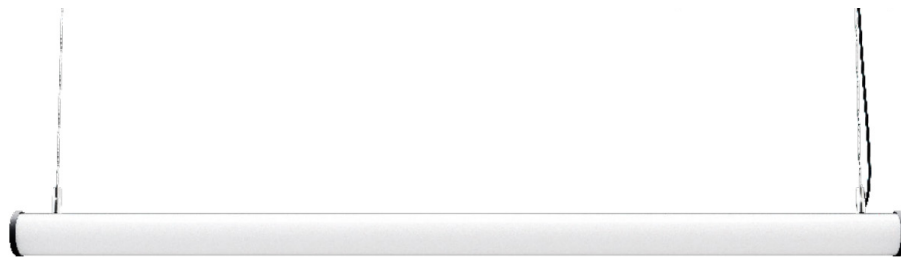


# NOODLE-PRO



Surface & Suspended

**The NOODLE-PRO is a high performance cylindrical linear luminaire suitable for both suspended and surface mounting. Available in 1000mm or 1500mm lengths.**

- A range of lumen outputs from 1955-5401lm
- Colour Temperatures: 3000k - 4000k
- Colours: Black, Silver or any RAL colour (/BK/SLV/RAL)
- Available with Dimming (/STD/1-10V/DALI/SDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Mounting: Surface Mounted or Wire Suspended (/SM/WS)
- Diffuser: Opal
- Dimensions: (Diameter x Height)
  - /1000mm - Ø60 x 1000mm
  - /1500mm - Ø60 x 1500mm

Product	MIS/NOODLE-PRO Surface Mounted or Suspended LED Luminaire							
Light Source	LED							
System Power Luminaire lumens (4000K)	/16.2W 1955lm	/20.8W 2513lm	/25W 3067lm	/29.4W 3601lm	/24W 2932lm	/31W 3770lm	/37W 4601lm	/43W 5401lm
Lengths	/1000mm 1000mm				/1500mm 1500mm			
Driver	/STD Non-Dimming		/DALI DALI Dimming		/SDIM Switch Dimming		/WI Wireless Control	
Colour Temperature	/830 3000k				/840 4000k			
Colour	/BK Black		/SLV Silver		/RAL RAL Colour			
Diffuser Options	/OP Opal							
Emergency	/ME3 Three hour main- tained emergency		/ME3-ST Three hour maintained self test emergency		/ME3-PRO Three hour DALI addressable emergency		/ME3-WI Three hour Wireless addressable emergency	
To Specify: NOODLE-PRO LED, 16.2W, 1955lm, 4000k, LED suspended with a Opal diffuser supplied complete with DALI control gear, and black end caps. Part code: MIS/NOODLE-PRO/16.2W/1955lm/DALI/840/BK/OP/WS/1000mm								

