

Description

This new range of edge lit Exit signs uses the latest LED technology. Each model combines modern aesthetics and technological functionality. These luminaires can be used as maintained illuminated signs. They consist of two pieces, the illuminated sign with the LED's and the control circuit which is placed on the ceiling or the wall. They can also be recess mounted on a suspended ceiling using the mounting springs contained in the package.

General Features

- Slim profile of only 15mm rated IP30
- Signs available (S) single or (DS) double sided
- High luminosity white LEDs with a long life span
- Surface, recess and wall mounting options available
- A (MIRPXL) fully recessed option is also available.
- 3 sizes available dependant on LED lamp choice
- 3 hour duration with Ni-Cd batteries
- Test button - Charge indication LED
- Markings according to EN-1838
- Produced in accordance with European standards EN 60598-1 & EN 60598-2-22

Emergency Options

- (ME3) 3 hour maintained
- (NM3) 3 hour non maintained
- (CB) central battery
- (MO) mains only operation
- (ST) self test

Legend Options

- (AL) Running Man Arrow Left
- (AR) Running Man Arrow Right
- (AU) Running Man Arrow Up
- (AD) Running Man Arrow Down

Installation

Surface/Wall:


Screw fixed at 274 x 47mm centres

Recessed:

278 x 47mm cut out retained using support clips supplied



Pendant mount emergency LED exit sign (MIPXL)

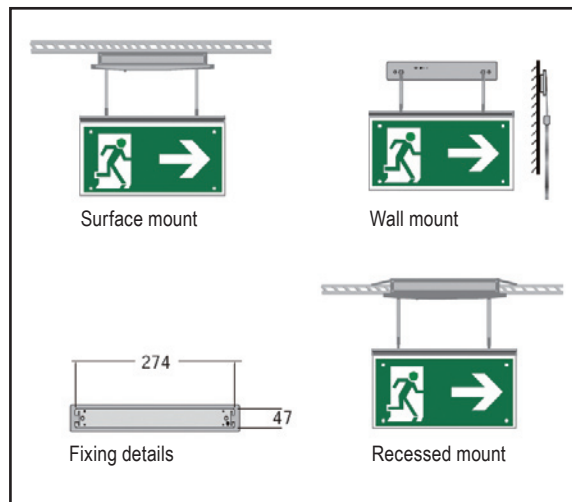

Legend Options

(AU) Arrow Up



(AD) Arrow Down



(AL) Arrow Left



(AR) Arrow Right



ORDERING INFORMATION - For other sizes/lamp types/finishes/styles not listed please call us

Reference Number	Nominal size l x w x h mm	Lamp & Wattage LED	Power Consumption VA	Light Output mcd	Legend Options				Emergency Options	
					AU	AD	AL	AR	ME3	NM3
MIPXL 28	280 x 15 x 120	8 x smd - White	5 VA	6000 mcd	*	*	*	*	*	*
MIPXL34	340 x 15 x 190	11 x smd - White	6 VA	7000 mcd	*	*	*	*	*	*
MIPXL44	440 x 15 x 240	13 x smd - White	7 VA	8200 mcd	*	*	*	*	*	*

When ordering quote reference number followed by essential & specific options.