
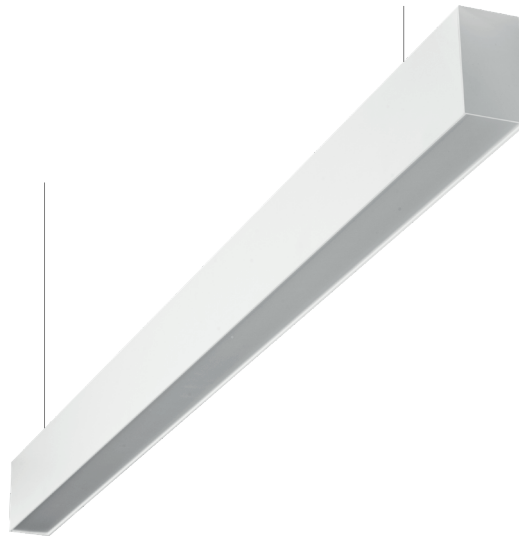


SPACELINE50



A high quality surface or suspended extruded system ideally suited for modular or continuous runs.

- A range of lumen outputs from 2081-4169lm
- Colour Temperatures: 3000k - 4000k - 6000k - TWH
- Colour: White RAL9016, Black 9005 and Silver 9006 as standard, other RAL colours available
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3- PRO)
- Wireless Emergency (/ME3-WI)
- Distribution: Direct or Direct/Indirect options (/DL/UDL)
- Diffusers: Polar White or Micro Prismatic Optic (/PW/MPO)
- A range of modular length available from 870-2970mm, available in continuous lengths to suit requirements
- Nominal Dimensions: (Width x Height) 49 x 85mm
- Aluminium extruded body

Product	MIS/SPL50 Surface LED Linear			
Light Source	LED			
SYS Power Luminaire lumens (4000K)	/19W 2081lm	/31W 3330lm	/24W 2605lm	/39W 4169lm
Size	/12 1150mm		/15 1430mm	
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000k	/840 4000k	/860 6000k	/TWH Tunable White
Colour	/WH White - RAL9016	/BK Black - RAL9005	/SLV Silver - RAL9006	
Diffuser Options	/PW Polar White Diffuser		/MPO Micro Prismatic Optic	
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour main- tained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless address- able emergency
To Specify: SPACELINE50 LED, 39W, 4000k, 4169lm LED linear surface finished white supplied complete with DALI control gear and polar white diffuser. Part code: MIS/SPL50/15/39W/4169lm/15/DALI/840/WH/PW				

