


SPACELINE60

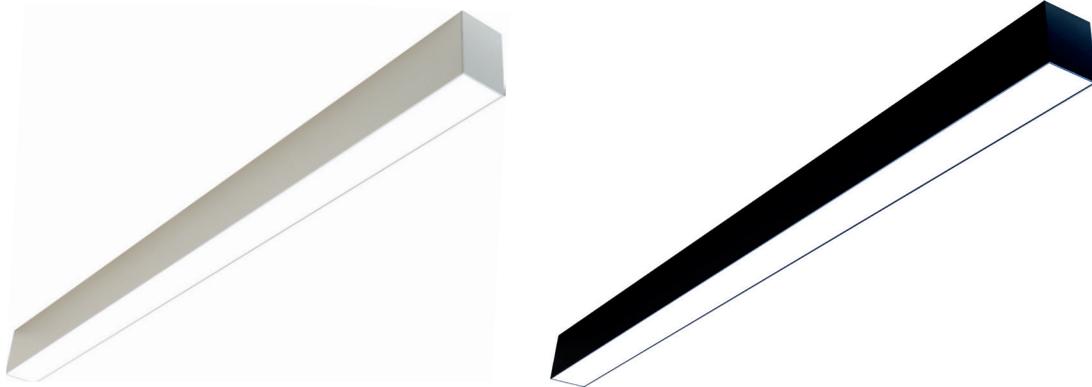

SPACELINE60 range is an energy efficient surface or suspended linear luminaire. With a range of outputs and a modern minimalist design the luminaire is suitable for a wide range of applications including offices, meeting rooms, circulation areas and receptions.

Surface & Suspended

- A range of low, standard and high lumen outputs
- Available with various sizes, wattage and lumen outputs
- Colour Temperatures: 3000k - 4000k - 5000k - TWH
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Distribution: Direct or Direct/Indirect options (/DL/UDL)
- Mountings: Surface as standard, Wire suspension or wall mounting bracket (/WS/WMB)
- Diffusers: Polar White or Micro Prismatic Optic (/PW/MPO)
- A range of modular lengths available from 578-3595mm, available in continuous lengths to suit requirements
- Nominal Dimensions: (Width x Height) 60 x 90mm
- 5 year system warranty

Product	MIS/SPL60 Surface or Suspended LED Linear			
LED Light Source	/LO Low Output	/SO Standard Output	/HO High Output	
Lumens/m <small>Luminaire lumens (4000K)</small>	17W 1836lm/m	25W 2692lm/m	32.4W 3429lm/m	
Lengths	/6 578mm	/9 859mm	/12 1139mm	/15 1420mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000k	/840 4000k	/850 5000k	/TWH Tunable White
Colour	/WHRAL9016 White RAL9016	/WHRAL9010 White RAL9010	/BKRAL9005 Black RAL9005	/SLV Anodic Silver
Diffuser Options	/PW Polar White		/MPO Micro Prismatic Optic	
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour main- tained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency
To Specify: SPACELINE60 LED, Standard Output, 2692lm per meter, 4000k, 1139mm long, LED modular suspended downlight finished white RAL9016 supplied complete with DALI control gear, Wireless Control and polar white diffuser. Part code: MIS/SPL60/SO/12/DALI/WI/WHRAL9016/PW/DL/WS				

Section View Dimensions

