






The TRK-GLOBE is a decorative LED track-mounted pendant luminaire is designed for general lighting and can be installed either suspended or directly onto a track adapter, offering up to 148 lm/W efficacy.

- A lumen output of 2084-2690lm
- Colour Temperatures: 3000K - 4000K
- Colours: Black, Grey or White (/BK/GR/WH)
- Available with Dimming (/STD/1-10V/DALI/SDIM)
- Wireless Control (/WI)
- Emergency not available
- Refer to track system **page 94** for the following mountings, Surface, Recessed and Wire suspended
- TRK-GLOBE Mounting Directly on Track: Surface Mounted or Suspended (/SM/WS)
- Diffuser: Opal PMMA diffuser
- Dimensions: Sphere (/400) - 400mmØ, (/300) - 300mmØ


Product	MI/TKR-GLOBE LED Spherical Track Luminaire				
LED	/300		/400		
System Power Luminaire lumens (4000K)	/14.4W 2148lm	/16.8W 2573lm	/14.8W 2084lm	/16.9W 2382lm	/18.5W 2690lm
Size	300mmØ (Diameter)		400mmØ (Diameter)		
Driver	/STD Non Dimming	/1-10V 1-10V Dimming	/DALI DALI Dimming	/SDIM Mains Dimming	/WI Wireless Control
Colour Temperature	/830 3000K		/840 4000K		
Colour	/BK Black		/GR Grey		/WH White
Emergency	n/a				
To Specify: MI/TKR-GLOBE, 400mm diameter LED spherical track luminaire, CRI80, 4000K, 16.9W, 2382lm, DALI dimming, finished in black that is surface mounted directly on the track. Part code: MI/TKR-GLOBE/400/840/16.9W/2382lm/DALI/BK/SM					

Mounting Options Directly On Track

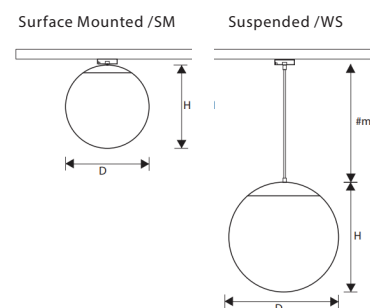

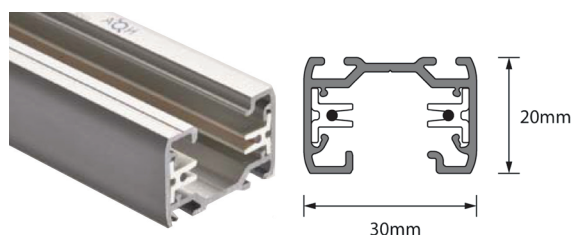

Single circuit track (/1CT)

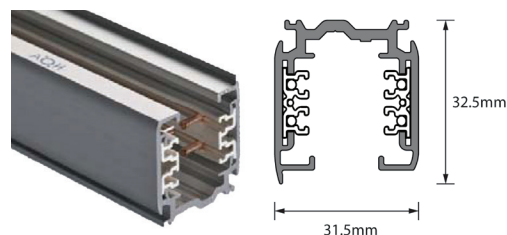

Three circuit track (/3CT)

The TRK System is a versatile track solution that can be configured for a wide range of applications using optional accessories, and is compatible with additional luminaires to create a bespoke setup.

- Available in single or 3-circuit track (/1CT/3CT);
3-circuit supports DALI dimming
- Connectors: Straight, L-shape & T connectors.(/SC/LC/TC)
Contact technical for details.
- Track accessories available: End Cap, Feed, Connector, Live Feed, L Feed, and Mid Feed (See part codes below)
- Emergency: See p.173 for EMLED TRK fitting
- Installation: Track system is suitable for use with our TRK range and global trac compatible spotlights.
- Mountings: Surface, Recessed or Suspended (/SM/R/WS)
- IP Rating: IP20
- Colours: 1m or 2m lengths available in satin silver or white (/SS/WH)
- Dimensions: (Width x Height) - See Images above

Product	MI/TRK-S LED TRK System		
Light Source	LED		
Circuit	/1CT Single Circuit Track	/3CT Three Circuit Track	
Size	/1M 1 Metre	/2M 2 Metre	
Driver	/1CT (STD) Non Dimming	/3CT (DALI) DALI Dimming	
Colour	/WH White	/SS Satin Silver	
Connectors	/SC Straight connector	/LC L Shape Connector	/TC T Connector
Additional connectors	Please see details in the text box above.		
To Specify: TRK System, Three circuit track (DALI), two metres, satin silver. Part code: MI/TRK-S/3CT/2M/SS Track lengths can be site cut, this must be done using appropriate tools and fully in accordance with installation instructions, copies available on request. It is the installing contractors responsibility to ensure a fully compliant and safe installation.			

