




The step-less adjustable beam angle from 15-60° and the possibility of dimming within a range of 10-100% with a potentiometer on the rear, gives you the freedom to choose the light level without any control system.

- A maximum lumen output of 2150lm
 - Colour Temperatures: 3000k
 - Zoom Lens: 15° to 60°
 - Colour: Black (/BK)
 - Available with Dimming (/STD/0-10V/DALI)
 - Direct Potentiometer via Mains Dimming located on the rear of the fitting (/MDIM)
 - Wireless dimming available (/WI)
- Adjustable: 355° rotational and 90° tilt able
 - Refer to track system page 90 for the following mounting, Surface, Recessed and Wire suspended
 - CRI90 as standard
 - Dimensions: (Diameter x Length)
Ø85 x 225mm

Product	MI/TRK-ZOOM Direct Potentiometer Dimming LED TRK Spotlight				
Light Source	LED				
System Power Luminaire lumens (4000K)	/29W 2150lm				
Size	Ø85 x 225mm				
Driver	/STD Non Dimming	/1-10V 1-10V Dimming	/DALI DALI Dimming	/MDIM Mains Dimming	/WI Wireless Control
Colour Temperature	/930 3000k				
Colour	/BK Black				
Emergency	n/a				
To Specify: TRK-ZOOM, 29W, 2150lm, 3000k, CRI90, LED track spotlight supplied with DALI control gear and finished in black. Part code: MI/TRK-ZOOM/29W/2150lm/DALI/930/BK					

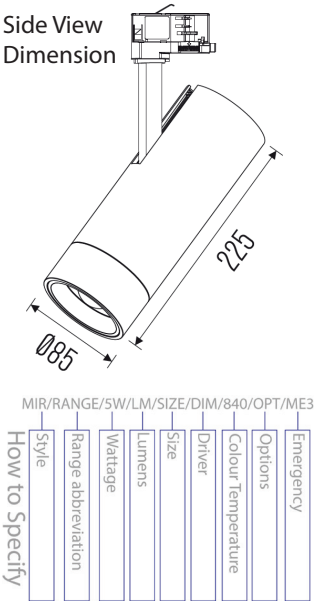


MAGNETIC- TRK SYSTEM

Connector Installations


Various connecting options for the
Magnetic TRK solutions shown below.
Designed for desired shape and size.

Mountings


/P






/RS




/SM




/WS

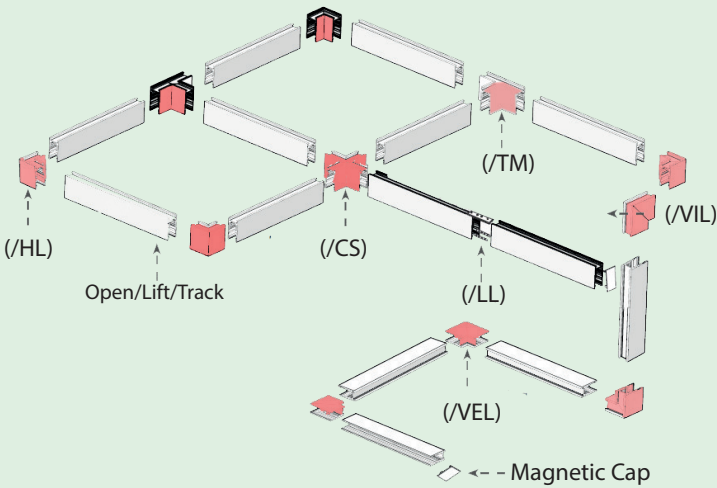


Vertical inner L splicing
(/VIL)




Vertical external L
splicing Installation (/VEL)




Linear Track line splice
(/LL)

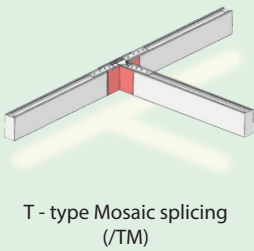

T - type Mosaic splicing
(/TM)

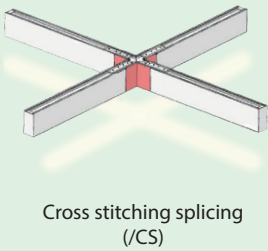

Cross stitching splicing
(/CS)

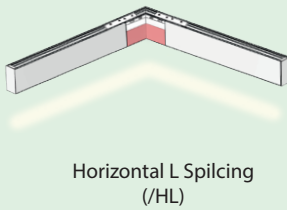

Horizontal L Splicing
(/HL)