


TUBE-SLIM

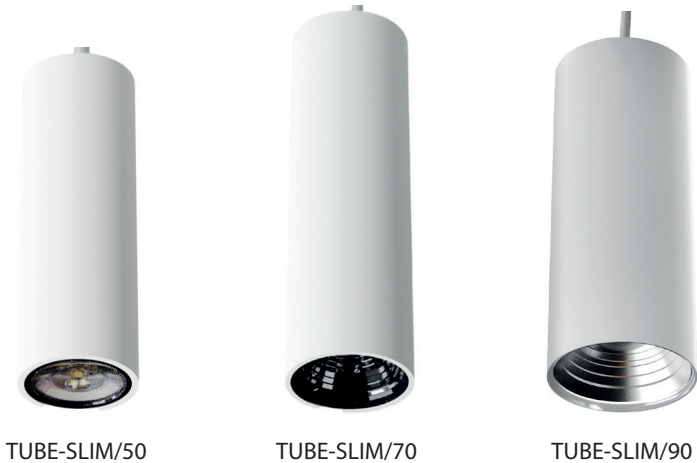

TUBE-SLIM/50

TUBE-SLIM/70

TUBE-SLIM/90

The TUBE SLIM is a surface or suspended minimalist cylindrical downlight with a durable aluminium build.

The suspended model offers adjustable drop height, ideal for adding visual interest in architectural settings.

- A range of lumen outputs 877-1316lm
- Colour Temperatures: 3000K - 4000K
- Colours: White or Black (/WH/BK)
- Available with Dimming (/STD/DALI)
- Wireless Control (/WI) & Wireless Emergency (/RME3-WI)
- Remote Emergency: (/RME3/RME3-ST/RME3-PRO)
- Remote Emergency not available TUBE-SLIM/50
- Mounting: Surface mounted or Wire suspended (/SM/WS)
- Beam Angles: (/10D/14D/35D/55D)
- IP Rating: IP20
- Dimensions: (Diameter x Depth)
 Ø57 x 170mm
 Ø76 x 250mm
 Ø90 x 220mm

LED Products	TUBE-SLIM							
Diameter	/50 Ø57mm	/70 Ø76mm			/90 Ø90mm			
System Power Luminaire lumens (4000K)	8.5W /1130lm	8.1W /1076lm	10.1W 1076lm	12.1W /1291lm	/7.2W 941lm	/10.8W 1411lm	/12.6W 1646lm	/16.1W 2116lm
Driver	/STD Non Dimming		/DALI DALI Dimming			/WI Wireless Control		
Colour Temperature	/830 3000k				/840 4000k			
Body Colour	/WH White				/BK Black			
Beam Angle	/10D 10° beam		/14D 14° beam		/35D 35° beam		/55D 55° beam	
Emergency	/RME3 Remote Three hour maintained emergency		/RME3-ST Remote Three hour maintained self test emergency		/RME3-ST Remote Three hour maintained self test emergency		/RME3-WI Remote Three hour Wireless addressable emergency	
To Specify: TUBE-SLIM with a Ø57mm, 8.5W, 4000K, 1130lm LED surface can, finished white, surface mounted, supplied with a 10° beam reflector and standard non-dimming driver. Part code: TUBE-SLIM/50/8.5W/1130lm/STD/840/WH/10D/SM								



Black Version
TUBE-SLIM/70/BK

MIR/RANGE/SW/LM/SIZE/DIM/840/OPT/ME3	Style	Range abbreviation	Wattage	lumens	Size	Driver	Colour Temperature	Options	Emergency
How to Specify									