


# WAFER-L SURFACE

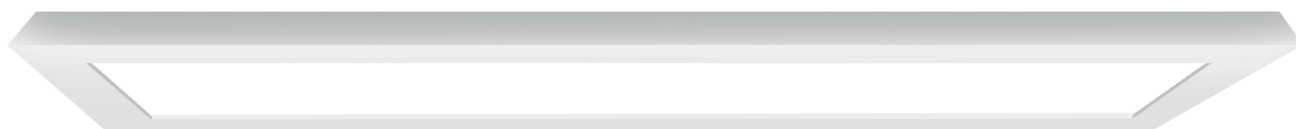

**An architectural, surface, linear ultra shallow LED solution. Surface; ideal for restricted ceiling heights.**

- A lumen output of 1371lm or 2386lm
- Colour Temperatures: 3000k - 4000k
- Colours: White (/WH)
- Available with Dimming (/STD/DALI/SDIM/MDIM)
- Wireless Control (/WI)
- Available with remote Emergency (/RME3/RME3-ST /RME3-PRO)
- Wireless Emergency (/RME3-WI)
- Diffuser: Opal (/OP)
- Dimensions: (Length x Width x Depth)
  - /20W - 600 x 150 x 48mm
  - /40W - 1200 x 150 x 48mm
- Shallow Depth: 48mm

Product	MIS/WAF-L Surface WAFER Linear				
Light Source	LED				
System Power <small>Luminaire Lumens (4000K)</small>	/20W 1371lm		/40W 2386lm		
Size	/6 600mm		/12 1200mm		
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/MDIM Mains Dimming	/WI Wireless Control
Colour Temperature	/830 3000k		/840 4000k		
Bezel Colour	/WH White				
Diffuser Options	/OP Opal Diffuser				
Emergency	/RME3 Remote three hour maintained emer- gency	/RME3-ST Remote three hour maintained self test emergency	/RME3-PRO Remote three hour DALI addressable emergency	/RME3-WI Remote three hour Wireless addressable emergency	
To Specify: WAFER-L LED, 40W, 4000k, 2386lm LED surface luminaire finished white complete with remote control gear. Part code: MIS/WAF-L/40W/2386lm/12/STD/840/WH/OP					

