



WAFER-C RECESSED

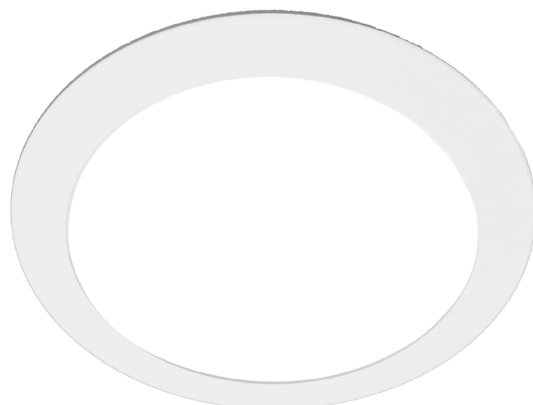

The WAFER-C is an architectural, circular, ultra shallow LED solution. Recessed; ideal for restricted ceiling heights and voids.

- A range of lumen outputs from 537-2840lm
- Colour Temperatures: 3000k - 4000k
- Colour: White (/WH)
- Available with Dimming (/STD /DALI /SDIM /MDIM)
- Wireless Control (/WI)
- Available with remote Emergency (/RME3 /RME3-ST /RME3-PRO)
- Wireless Emergency (/RME3-WI)
- Diffuser Options: Opal
- Dimensions: (Diameter) See table below
- Shallow Depth: 19mm (depth without driver, driver depth may vary)
- Cut-out Dimensions: (Diameter) See table below

Product	MIR/WAF-C Recessed WAFER Circular				
Light Source	LED				
System Power <small>Luminaire lumens (4000K)</small>	/8W 537lm	/11W 827lm	/15W 1118lm	/22W 1556lm	/28W 2840lm
Size	Ø 117mm	Ø 180mm	Ø 240mm		Ø 300mm
Cut-out	Ø 108mm	Ø 165mm	Ø 225mm		Ø 282mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/MDIM Mains Dimming	/WI Wireless Control
Colour Temperature	/830 3000k			/840 4000k	
Bezel Colour	/WH White				
Diffuser Options	/OP Opal Diffuser				
Emergency	/RME3 Remote three hour main- tained emergency	/RME3-ST Remote three hour maintained self test emergency	/RME3-PRO Remote three hour DALI addressable emergency	/RME3-WI Remote three hour Wireless addressable emergency	
To Specify: WAFER LED, 15W, 4000k, 1118lm LED downlight finished White with a Opal diffuser and complete with remote control gear and wishbone spring retainers. Part code: MIR/WAF-C/15W/1118lm/STD/840/WH/OP					



MIR/RANGE/SW/LW/SIZE/DIM/840/OPT/ME3

How to Specify

Style	Range abbreviation	Wattage	Lumens	Size	Driver	Colour Temperature	Options	Emergency
-------	--------------------	---------	--------	------	--------	--------------------	---------	-----------