



# WAFER-C SURFACE

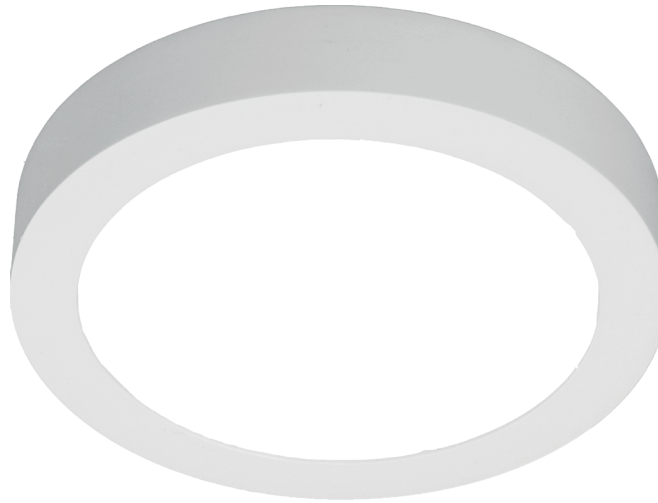

**An architectural, circular, ultra shallow LED solution. Surface; ideal for restricted ceiling heights.**

- A range of lumen outputs from 461-4340lm
- Colour Temperatures: 3000k - 4000k - 6500k
- Colours: White (/WH)
- Available with Dimming (/STD /DALI/ SDIM /MDIM)
- Wireless Control (/WI)
- Available with Emergency (/RME3 /RME3-ST/RME3-PRO)
- Wireless Emergency (/RME3-WI)
- Diffuser Options: Opal
- Dimensions: (Diameter) See table below
- Shallow Depth: 39mm
- Please note: 30W version has integral emergency

Product	MIS/WAF-C Surface WAFER Circular					
Light Source	LED					
System Power <small>Luminaire lumens (4000K)</small>	/8W 537lm	/11W 827lm	/15W 1118lm	/22W 1556lm	/28W 2840lm	/41W 4340lm
Size <small>Depth = 39mm</small>	Ø 117mm	Ø 180mm	Ø 240mm		Ø 300mm	Ø 420mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming		/MDIM Mains Dimming	/WI Wireless Control
Colour Temperature	/830 3000k			/840 4000k		
Bezel Colour	/WH White					
Diffuser Options	/OP Opal Diffuser					
Emergency	/RME3 Remote three hour maintained emergency	/RME3-ST Remote three hour maintained self test emergency		/RME3-PRO Remote three hour DALI addressable emergency		/RME3-WI Remote three hour Wireless addressable emergency
To Specify: WAFER CIRCULAR LED, 15W, 4000k, 1118lm LED surface downlight finished White complete with DALI control gear. Part code: MIS/WAF-C/15W/1118lm/DALI/840/WH/OP						



MIR/RANGE/5W/LM/SIZE/DIM/840/OPT/ME3

How to Specify

- Style
- Range abbreviation
- Wattage
- Lumens
- Size
- Driver
- Colour Temperature
- Options
- Emergency